

# HAMMER™ TK Series


TK-122

## SPECIFICATIONS



<b>Model</b>	TK-122 (12" 2way full range system)
<b>Power Handling</b>	400W (Cont) / 800W (Prog) / 1600 (Peak)
<b>Frequency Range</b>	32Hz -20KHz
<b>Frequency Response</b>	47Hz -18KHz
<b>Average Sensitivity</b>	101dB(W/m)
<b>Max SPL</b>	129dB(PEAK/1M ±3dB)
<b>Nominal Impedance</b>	8Ω
<b>Nominal Directivity</b>	80°(H) x 45°(V) Horn Rotable
<b>Low Frequency Driver</b>	Titanium Diaphragm 75mm(3") Coil / 310mm(12") woofer
<b>High Frequency Driver</b>	Titanium diaphragm 44mm(1.75") Coil Compression driver
<b>Flying Hardware</b>	20 x M8 points
<b>Connectors</b>	2 x Speakon® NL4MP (1+/1- Input & Link)
<b>Floor Monitor Use</b>	Yes, 2 angles.
<b>Pole Mount</b>	35mm pot
<b>Enclosure</b>	CNC made with tongue and grove assembly 17mm birch plywood
<b>Finish</b>	Touring grade textured black Paint coating
<b>Dimensions</b>	370mm(W)×605mm(H)×400mm(D)
<b>Weight</b>	26.5kg net

## Images

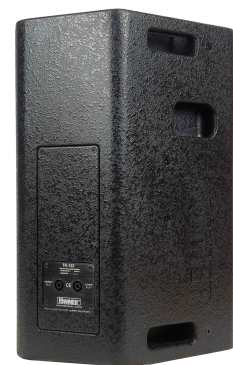

## Detail

TK-122 is specially designed for a small-size concert hall. TK series feature perfect low-pitched sound playing from 3" (75mm) titanium driver and powerful magnet. In particular, the low-pitched unit designed by their own special coating remains intact without any transformation over time, and it is designed to have the excellent performance in spite of an amplifier's degradation. Furthermore, its 1.75" titanium-compressed driver applied in medium and upper range and network design superiorly paly sounds in order for audiences to be able to be fascinated by acoustic performance surrounded by plentiful low-pitched sounds and natural and clear performance. Also, an enclosure designed with specially-bonded plywood doesn't generate unnecessary resonance around speakers.